


Sawaru

■ F6640030 - Black

Designed by Nendo,Nendo

A light consisting of two independent cylinders touching each other in a perpendicular direction. One plays the role of a light source, while the other acts as a base. Its projection angle can be adjusted in three stages of 25, 40 or 60 degrees, by inserting the pin attached to the base. Various functions are made possible by doing away with excess elements and creating a simple form.

Base and body in extruded aluminium with painted or galvanized finish. Diffuser in photo-etched injection-moulded polycarbonate. Reflector in painted die-cast aluminium. Dimmer function and channel mixing via a pedal switch on the cord. Corded power supply with interchangeable plugs.




Main specifications

Mounting	Floor	Lamp holder	LED Module
Environment	Indoor dry location	Autoprotected Lamp	No
Light source type	LED	Number of heads	1
Light source replaceable	Replaceable (LED only) light source by a professional LED Module	Source Power (W)	45
		System Flux (lm)	Depend on regulatio

LED type

Optical

Lighting Type	Indirect
Lighting distribution	Symmetric
Cold Beam Lighting	No
Extreme Cut off	No

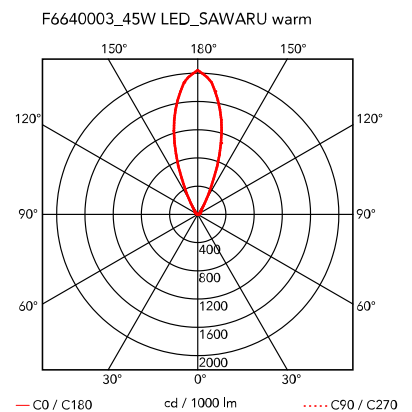

Electrical

Insulation class	III	Batteries Inside	No
Frequency (Hz)	50/60	Power supply replaceable	Replaceable control gear by an end-user
Main Voltage (Vac)	100-240/48	Cord length (mm)	2500
Driver	Remote included	Plug Type	Type G, Type A, Type C
Dimmable type	Electronic 12V	Charging Min Time	No

Physical

Colour	Black	IP external	20
Length (mm)	430		
Net weight (kg)	4.5		
Gross weight (kg)	9.92		
IP	20		